

HCPL2730, HCPL2731 DUAL-CHANNEL OPTOCOUPLERS/OPTOISOLATORS

SOOS020 D3262, JUNE 1989

- Dual-Channel Optocouplers
- High Current Transfer Ratio . . . 1800% Typ at $I_f = 0.5 \text{ mA}$
- Low Input Current Requirement . . . 0.5 mA
- High-Speed Switching . . . 100 kbit/s Typ
- High Common-Mode Transient Immunity . . . 500 V/ μs Typ
- High-Voltage Electrical Insulation . . . 3000 V DC Min
- High Output Current Rating of 60 mA
- UL Recognized . . . File Number 65085

description


These devices are useful where large common-mode input signals exist, and in applications that require high-voltage isolation between circuits. Applications include line receivers, telephone ring detectors, power line monitors, high-voltage status indicators, and circuits that require isolation between input and output.

The HCPL2730 and HCPL2731 dual-channel high-gain optocouplers each consists of a pair of light-emitting diodes and integrated high-gain photon detectors. The VCC and output terminals may be tied together to achieve conventional photodarlington operation. An integrated emitter-base bypass resistor is provided for low leakage.

The HCPL2730 is designed for use primarily in TTL applications. An LED input current of 1.6 mA and a minimum current-transfer ratio of 300% from 0°C to 70°C allow operation with one TTL-load input and one TTL-load output utilizing a 2.2-k Ω pullup resistor.

The HCPL2731 is designed for use in CMOS, LSTTL, or other low-power applications. This device has a minimum current-transfer ratio of 400% for only 0.5-mA input current over an operating temperature range of 0°C to 70°C.

mechanical data

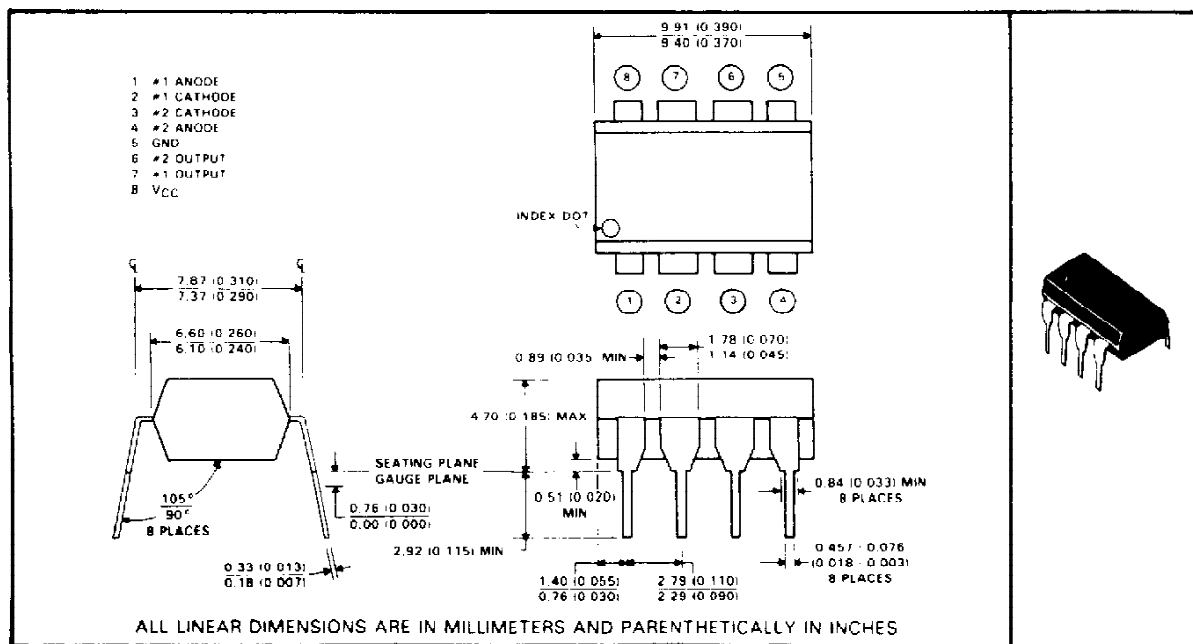

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1989, Texas Instruments Incorporated

HCPL2730, HCPL2731 DUAL-CHANNEL OPTOCOUPLERS/OPTOISOLATORS

schematic

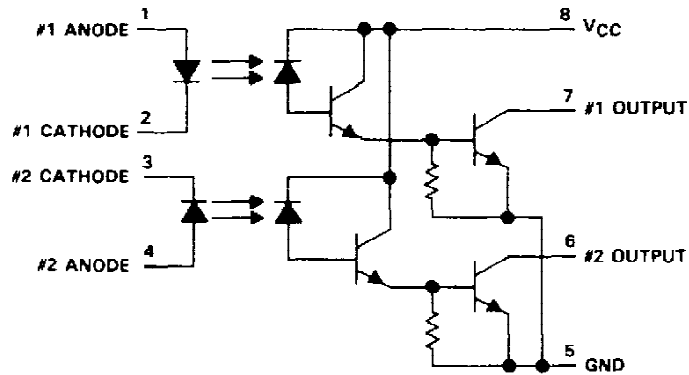

absolute maximum ratings at 25°C free-air temperature range (unless otherwise noted)

Supply and output voltage range, V_{CC} and V_O : HCPL2730	-0.5 V to 7 V
HCPL2731	-0.5 to 18 V
Reverse input voltage	5 V
Peak input forward current per channel (pulse duration = 1 ms, 50% duty cycle)	40 mA
Average forward input current per channel at (or below) 50°C free-air temperature (see Note 1)	20 mA
Output current per channel at (or below) 35°C free-air temperature (see Note 2)	60 mA
Input power dissipation per channel at (or below) 50°C free-air temperature (see Note 3)	35 mW
Output power dissipation per channel at (or below) 35°C free-air temperature (see Note 4)	100 mW
Operating temperature range	-40°C to 85°C
Storage temperature range	-55°C to 125°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260°C

- NOTES: 1. Derate linearly above 50°C free-air temperature at a rate of 0.67 mA/°C.
 2. Derate linearly above 35°C free-air temperature at a rate of 1.2 mA/°C.
 3. Derate linearly above 50°C free-air temperature at a rate of 1.0 mW/°C.
 4. Derate linearly above 35°C free-air temperature at a rate of 2.0 mW/°C.

HCPL2730, HCPL2731 DUAL-CHANNEL OPTOCOUPLEDERS/OPTOISOLATORS

electrical characteristics over operating free-air temperature range of 0°C to 70°C (unless otherwise noted)

PARAMETER	TEST CONDITIONS	HCPL2730			HCPL2731			UNIT	
		MIN	TYP [†]	MAX	MIN	TYP [†]	MAX		
V _F	Input forward voltage	I _F = 1.6 mA, T _A = 25°C			1.5	1.7	1.5	1.7	V
α _{VF}	Temperature coefficient of forward voltage	I _F = 1.6 mA			-1.8			mV/°C	
V _{BR}	Input breakdown voltage	I _R = 10 μA, T _A = 25°C			5			V	
V _{OL}	Low-level output voltage	V _{CC} = 4.5 V, I _F = 1.6 mA, I _{OL} = 4.8 mA, I _B = 0			0.1	0.4			V
		V _{CC} = 4.5 V, I _F = 1.6 mA, I _{OL} = 8 mA, I _B = 0					0.1	0.4	
		V _{CC} = 4.5 V, I _F = 5 mA, I _{OL} = 15 mA, I _B = 0					0.1	0.4	
		V _{CC} = 4.5 V, I _F = 12 mA, I _{OL} = 24 mA, I _B = 0					0.2	0.4	
I _{OH}	High-level output current	V _{CC} = 7 V, V _O = 7 V, I _F = 0, I _B = 0			0.1	250			μA
		V _{CC} = 18 V, V _O = 18 V, I _F = 0, I _B = 0					0.05	100	
I _{CCH}	Supply current, high-level output	V _{CC} = 7 V, I _O = 0, I _F = 0, I _B = 0			4			nA	
		V _{CC} = 18 V, I _O = 0, I _F = 0, I _B = 0			5				
I _{CCL}	Supply current, low-level output	V _{CC} = 7 V, I _O = 0, I _{F1} = 1.6 mA, I _{F2} = 1.6 mA, I _B = 0			0.4			mA	
		V _{CC} = 18 V, I _O = 0, I _{F1} = 1.6 mA, I _{F2} = 1.6 mA, I _B = 0			0.6				
CTR	Current transfer ratio	V _{CC} = 4.5 V, V _O = 0.4 V, I _F = 0.5 mA, I _B = 0, See Note 5			400% 1800%				
		V _{CC} = 4.5 V, V _O = 0.4 V, I _F = 1.6 mA, I _B = 0, See Note 5			300% 1000%				
r _{ii}	Input-input resistance	V _{ii} = 500 V			10 ¹¹			Ω	
r _{io}	Input-output resistance	V _{io} = 500 V, See Note 6			10 ¹²			Ω	
I _{ii}	Input-input insulation leakage current	V _{ii} = 500 V, t = 5 s, RH = 45%			0.005			μA	
I _{io}	Input-output insulation leakage current	V _{io} = 3000 V, t = 5 s, T _A = 25°C, RH = 45%, See Note 6			1			μA	
C _i	Input capacitance	V _F = 0, f = 1 MHz			60			pF	
C _{ii}	Input-input capacitance	f = 1 MHz			0.25			pF	
C _{io}	Input-output capacitance	f = 1 MHz, See Note 6			0.6			pF	

[†]All typical values are at V_{CC} = 5 V, T_A = 25°C, unless otherwise noted.

NOTES: 5. Current transfer ratio is defined as the ratio of output collector current I_O to the forward LED input current I_F times 100%.

6. These parameters are measured between pins 2 and 3 shorted together and pins 5, 6, 7 and 8 shorted together.

HCPL2730, HCPL2731 DUAL-CHANNEL OPTOCOUPLEDERS/OPTOISOLATORS

switching characteristics at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$


PARAMETER	TEST CONDITIONS	HCPL2730			HCPL2731			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
t_{PHL} Propagation delay time, high-to-low level output	$I_F = 1.6\text{ mA}$, $R_L = 2.2\text{ k}\Omega$, See Figure 1		2	20		2	20	μs
	$I_F = 0.5\text{ mA}$, $R_L = 4.7\text{ k}\Omega$, See Figure 1					7	100	
	$I_F = 12\text{ mA}$, $R_L = 270\ \Omega$, See Figure 1		0.4	2		0.4	2	
t_{PLH} Propagation delay time, low-to-high-level output	$I_F = 1.6\text{ mA}$, $R_L = 2.2\text{ k}\Omega$, See Figure 1		4	35		5	35	μs
	$I_F = 0.5\text{ mA}$, $R_L = 4.7\text{ k}\Omega$, See Figure 1					6	60	
	$I_F = 12\text{ mA}$, $R_L = 270\ \Omega$, See Figure 1		3	10		2	10	
$\frac{dV_{CM}}{dt}$ (H) Common-mode input transient immunity, high-level output	$V_{CM} = 10\text{ V}_{p-p}$, $I_F = 0$, $R_L = 2.2\text{ k}\Omega$, See Notes 7 and 8, See Figure 2		500			500		$\text{V}/\mu\text{s}$
$\frac{dV_{CM}}{dt}$ (L) Common-mode input transient immunity, low-level output	$V_{CM} = 10\text{ V}_{p-p}$, $I_F = 1.6\text{ mA}$, $R_L = 2.2\text{ k}\Omega$, See Figure 2 See Notes 7 and 8		-500			-500		$\text{V}/\mu\text{s}$

- NOTES: 7. Common-mode transient immunity, high-level output, is the maximum rate of rise of the common-mode input voltage that does not cause the output voltage to drop below 2 V. Common-mode input transient immunity, low-level output, is the maximum rate of fall of the common-mode input voltage that does not cause the output voltage to rise above 0.8 V.
8. In applications where dV/dt may exceed 50,000 $\text{V}/\mu\text{s}$ (such as static discharge) a series resistor, R_{CC} , should be included to protect the detector IC from destructively high surge currents. The recommended value is:


$$R_{CC} = \frac{1}{0.15 I_F (\text{mA})} \text{ k}\Omega$$

HCPL2730, HCPL2731
DUAL-CHANNEL OPTOCOUPPLERS/OPTOISOLATORS

PARAMETER MEASUREMENT INFORMATION

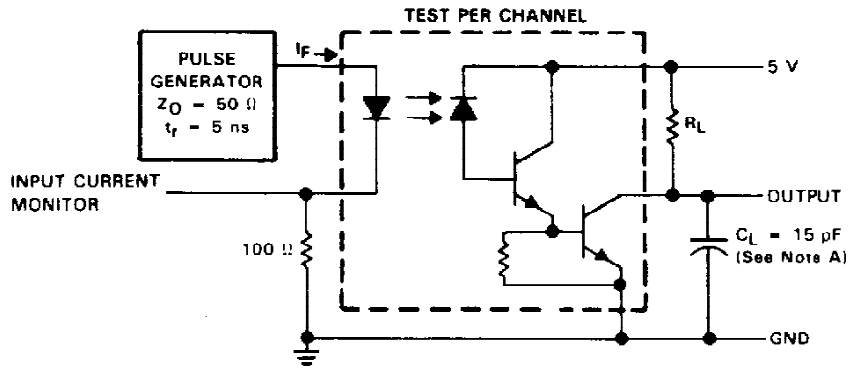

TEST CIRCUIT

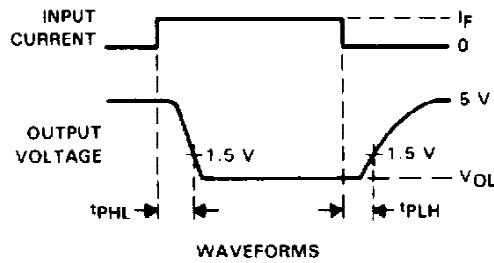


WAVEFORMS

NOTE A: C_L includes probe and stray capacitances.

FIGURE 1. SWITCHING TEST CIRCUIT AND WAVEFORMS

**HCPL2730, HCPL2731
DUAL-CHANNEL OPTOCOUPLERS/OPTOISOLATORS**

PARAMETER MEASUREMENT INFORMATION

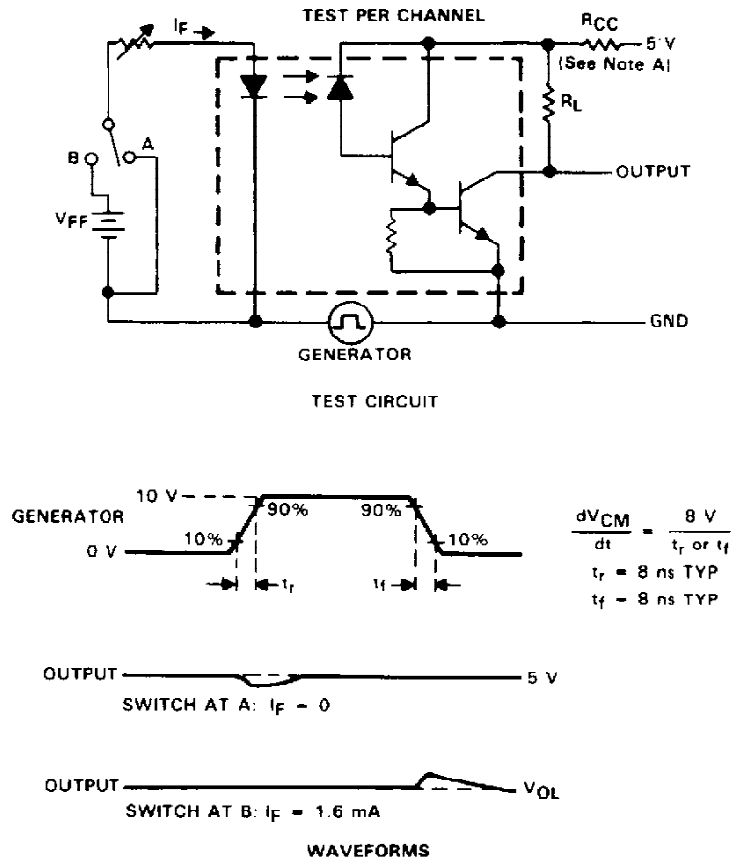

NOTE A: In applications where dV/dt may exceed $50,000 \text{ V}/\mu\text{s}$ (such as static discharge) a series resistor, R_{CC} , should be included to protect the detector IC from destructively high surge currents. The recommended value is:

$$R_{CC} = \frac{1}{0.15 I_F (\text{mA})} \text{ k}\Omega$$

FIGURE 2. TRANSIENT IMMUNITY TEST CIRCUIT AND WAVEFORMS

HCPL2730, HCPL2731 DUAL-CHANNEL OPTOCOUPLEDERS/OPTOISOLATORS

TYPICAL CHARACTERISTICS

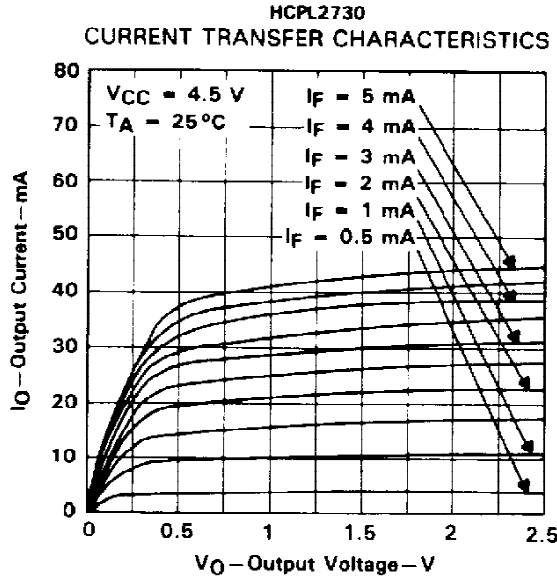


FIGURE 3

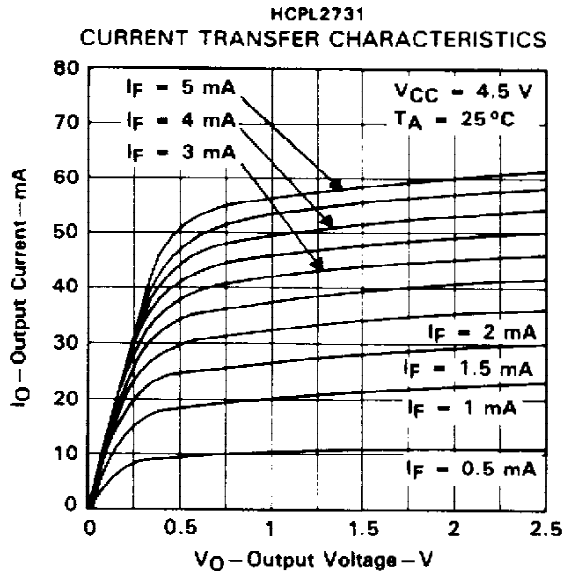


FIGURE 4

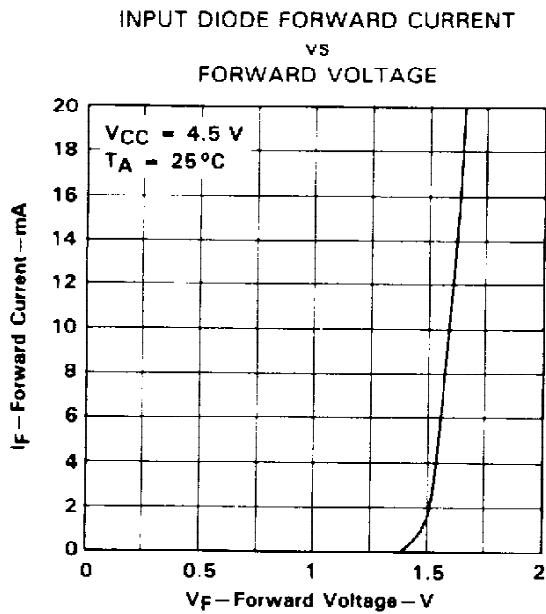


FIGURE 5

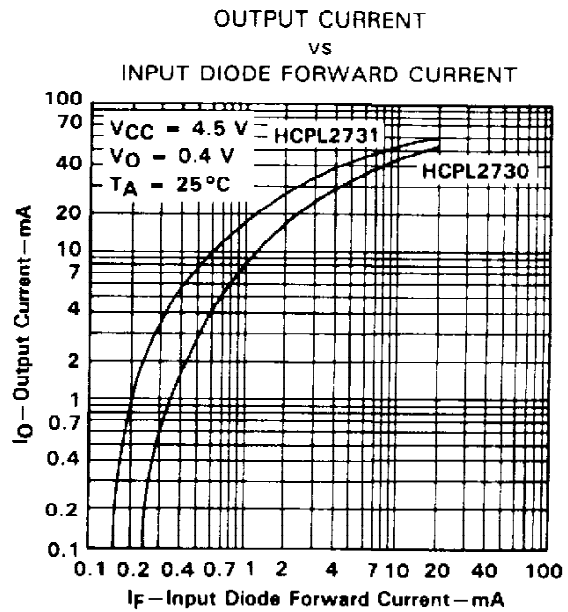


FIGURE 6

**HCPL2730, HCPL2731
DUAL-CHANNEL OPTOCOUPLEDERS/OPTOISOLATORS**

TYPICAL CHARACTERISTICS

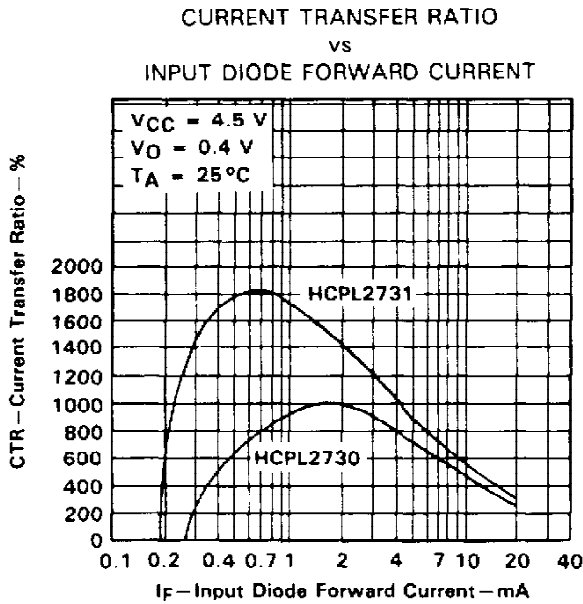


FIGURE 7

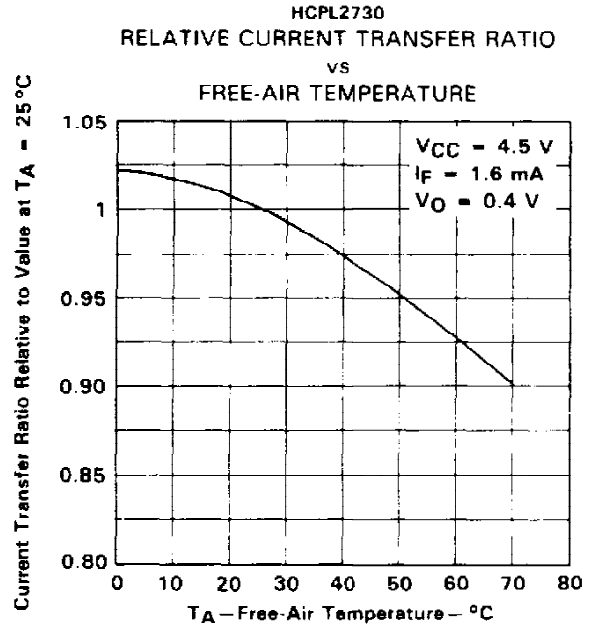


FIGURE 8

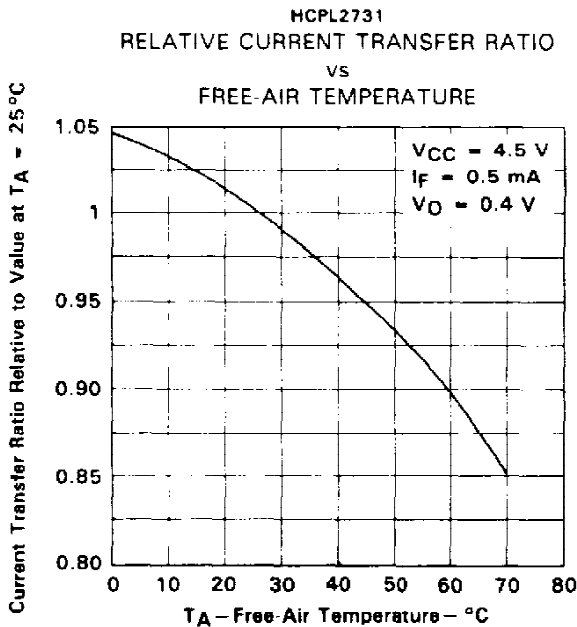


FIGURE 9

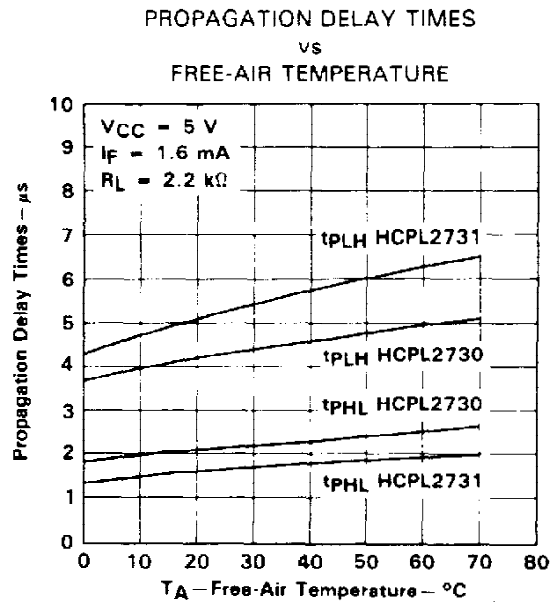


FIGURE 10

HCPL2730, HCPL2731 DUAL-CHANNEL OPTOCOUPPLERS/OPTOISOLATORS

TYPICAL CHARACTERISTICS

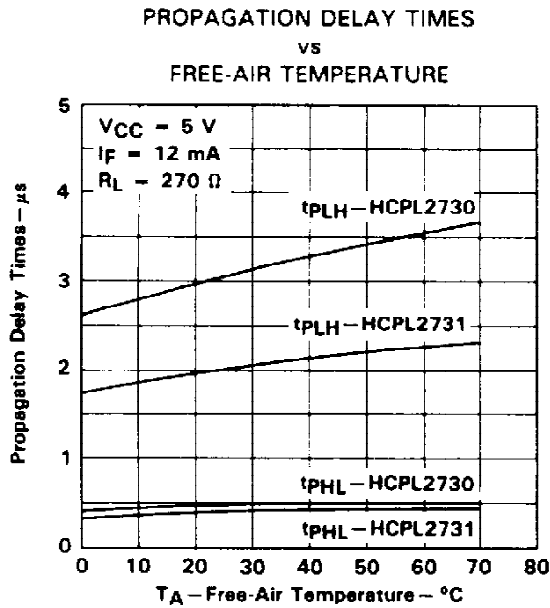


FIGURE 11

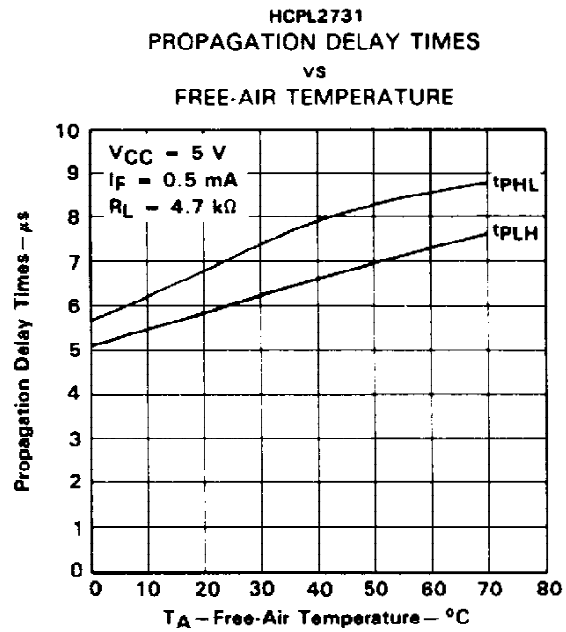


FIGURE 12

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.