

## R.F. PENTODE

R.F. pentode with variable transconductance intended for use as wide-band amplifier.

QUICK REFERENCE DATA		
Anode current	$I_a$	10 mA
Transconductance	$S$	6.0 mA/V
Amplification factor	$\mu_{g_2g_1}$	26 -
Internal resistance	$R_i$	600 k $\Omega$

**HEATING:** Indirect by A.C. or D.C.; series or parallel supply



Heater voltage  $V_f$  6.3 V

Heater current  $I_f$  300 mA

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval



### CAPACITANCES


Anode to all except grid No. 1	$C_a(g_1)$	3.2 pF
Grid No. 1 to all except anode	$C_{g_1(a)}$	6.9 pF
Anode to grid No. 1	$C_{ag_1}$	max. 0.007 pF
Grid No. 1 to heater	$C_{g_1f}$	max. 0.15 pF


**TYPICAL CHARACTERISTICS AND OPERATING CHARACTERISTICS**

Anode and supply voltage	$V_a = V_b$	250	V
Grid No.3 voltage	$V_{g3}$	0	V
Grid No.2 resistor	$R_{g2}$	60	$k\Omega$
Grid No.1 voltage	$V_{g1}$	-2	-35 V
Grid No.2 voltage	$V_{g2}$	100	- V
Anode current	$I_a$	10	- mA
Grid No.2 current	$I_{g2}$	2.5	- mA
Transconductance	S	6.0	0.06 mA/V
Internal resistance	$R_i$	0.6	>5 $M\Omega$
Amplification factor	$\mu_{g2g1}$	26	-
Equivalent noise resistance	$R_{eq}$	1.4	- $k\Omega$
Grid No.1 input resistance, $f = 50$ MHz	$r_{g1}$	9	- $k\Omega$

**LIMITING VALUES** (Design centre rating system)

Anode voltage	$V_{a0}$	max.	550 V
	$V_a$	max.	250 V
Anode dissipation	$W_a$	max.	2.5 W
Grid No.2 voltage	$V_{g20}$	max.	550 V
	$V_{g2}$	max.	250 V
Grid No.2 dissipation	$W_{g2}$	max.	0.65 W
Grid No.1 resistor	$R_{g1}$	max.	3 $M\Omega$
Cathode current	$I_k$	max.	15 mA
Heater to cathode voltage	$V_{kf}$	max.	150 V

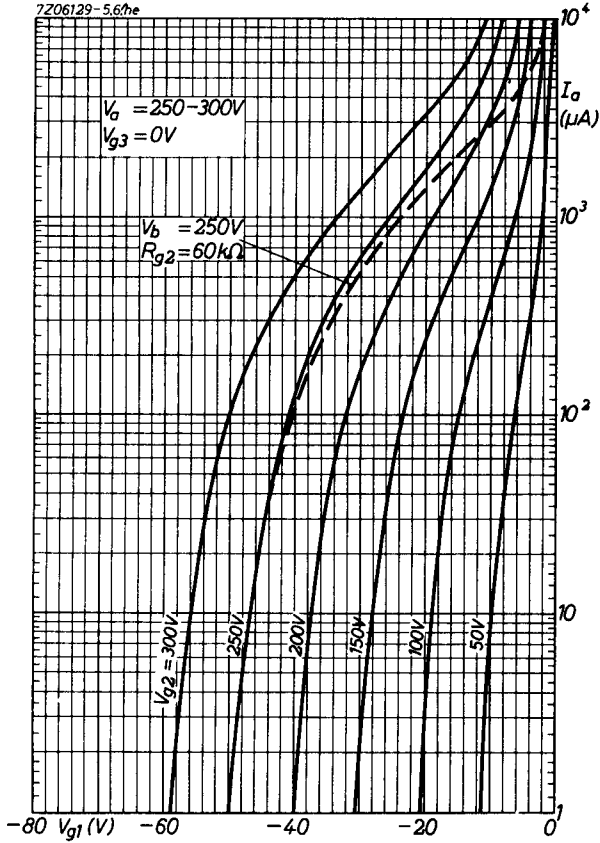

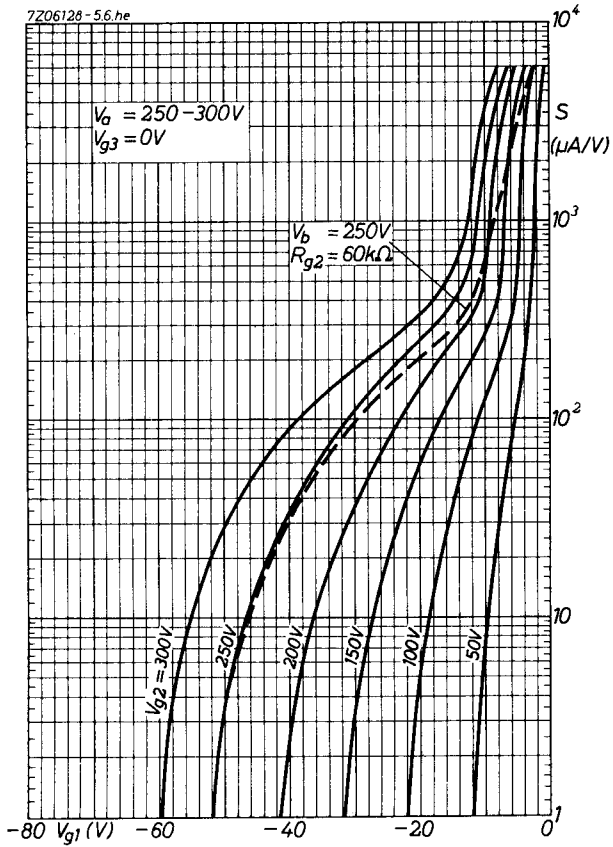

# PHILIPS

Data handbook



Electronic  
components  
and materials

**EF85**

<b>page</b>	<b>sheet</b>	<b>date</b>
1	1	1969.12
2	2	1969.01
3	3	1969.01
4	4	1969.01
5	FP	1999.08.16