

Termination BNC

50Ω

DC to 2000 MHz

BTRM-50+



CASE STYLE: LL85

Connectors	Model	Price	Qty.
BNC-Male	BTRM-50+	\$8.25 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

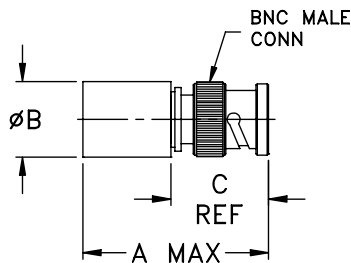

Outline Dimensions (inch/mm)

A	B	D	wt
1.46	.58	.75	grams
37.08	14.73	19.05	21.5

Features

- wideband, DC to 2000 MHz
- return loss, 30 dB typ. up to 1000 MHz
- rugged construction

Applications

- cellular communications
- satellite communications
- test set-up


Electrical Specifications

FREQUENCY (MHz)	IMPEDANCE (OHMS)	RETURN LOSS (dB) MIN.			POWER RATING* (W)
		DC-.5 GHz	DC-1 GHz	DC-2 GHz	
DC-2000	50	35	30	21	0.5

* At 70°C, derate linearly at 5mW/°C to 350mW at 100°C.

Typical Performance Data

Frequency (MHz)	Return Loss (dB)
10.00	54.89
86.15	55.01
162.31	55.35
238.46	56.34
314.62	58.22
390.77	61.38
466.92	62.22
543.08	57.18
619.23	52.72
695.38	49.30
771.54	46.56
847.69	44.35
923.85	42.41
1000.00	40.77
1166.67	37.77
1333.33	35.39
1500.00	33.45
1666.67	31.85
1833.33	30.50
2000.00	29.40

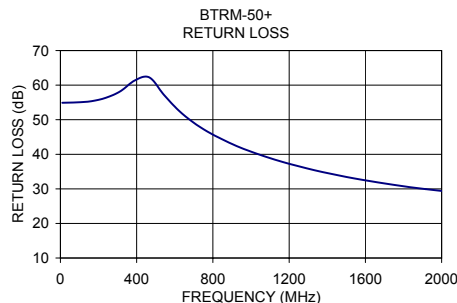

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *The Design Engineers Search Engine* Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M116870
BTRM-50+
RS/TD/CP/AM
080513