


**Rectifier diodes
Schottky barrier**

**PBYL1520CT, PBYL1520CTB
PBYL1525CT, PBYL1525CTB**

FEATURES

- Low forward voltage drop
- Repetitive ruggedness rated
- Very high efficiency
- Extremely fast switching
- Guaranteed reliability
- 150°C forward operation

SYMBOL

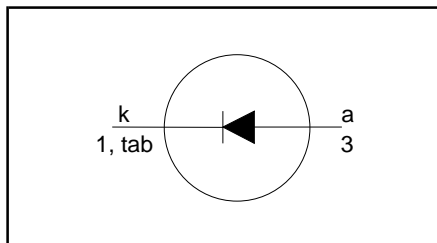

QUICK REFERENCE DATA

$V_{RRM} = 20, 25 \text{ V}$
$V_F \leq 0.42 \text{ V}$
$I_{O(AV)} = 15 \text{ A}$

GENERAL DESCRIPTION

Nickel silicide schottky barrier rectifier diodes in a plastic envelope. The devices are intended for use in switched mode power supplies, high frequency DC - DC converters or as or-ing diodes in fault tolerant power supply systems.


The PBYL1525CT series is supplied in the SOT78 (TO220AB) conventional leaded package.

The PBYL1525CTB series is supplied in the SOT404 surface mounting package.


PINNING

PIN	DESCRIPTION
1	anode 1 (a)
2	cathode (k)
3	anode 2 (a)
tab	cathode (k)

SOT78 (TO220AB)

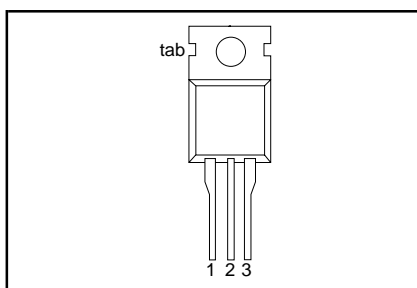

SOT404

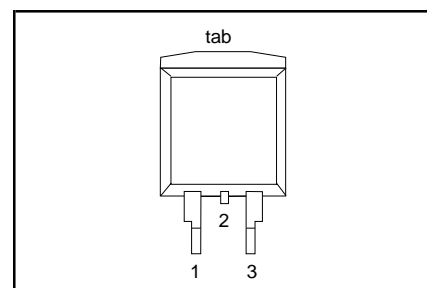

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

PARAMETER	CONDITIONS	SYMBOL	MIN.	MAX.		UNIT
Repetitive peak reverse voltage		V_{RRM}	-	-20 20	-25 25	V
Continuous reverse voltage	$T_{mb} \leq 132 \text{ }^\circ\text{C}$	V_R	-	20	25	V
Average forward current	square wave; $\delta = 0.5$; $T_{mb} \leq 133 \text{ }^\circ\text{C}$	$I_{O(AV)}$	-	15		A
RMS forward current		$I_{O(RMS)}$	-	21.2		A
Repetitive peak forward current	$t = 25 \text{ } \mu\text{s}$; $\delta = 0.5$; $T_{mb} \leq 133 \text{ }^\circ\text{C}$	I_{FRM}	-	15		A
Non-repetitive peak forward current	$t = 10 \text{ ms}$ $t = 8.3 \text{ ms}$ sinusoidal $T_j = 125 \text{ }^\circ\text{C}$ prior to surge; with reapplied $V_{RRM(max)}$	I_{FSM}	-	75		A
			-	83		A
Repetitive peak reverse current	$t_p = 2 \text{ } \mu\text{s}$; $\delta = 0.001$	I_{RRM}	-	1		A
Storage temperature		T_{stg}	-65	175		$^\circ\text{C}$
Operating junction temperature		T_j	-	150		$^\circ\text{C}$

Rectifier diodes
Schottky barrier

PBYL1520CT, PBYL1520CTB
PBYL1525CT, PBYL1525CTB

THERMAL RESISTANCES

PARAMETER	CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal resistance junction to mounting base	per diode both diodes	$R_{th\ j-mb}$	-	-	2.5	K/W
			-	-	1.75	K/W
Thermal resistance junction to ambient	in free air	$R_{th\ j-a}$	-	60	-	K/W







CHARACTERISTICS

$T_j = 25\text{ °C}$ unless otherwise stated

PARAMETER	CONDITIONS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Forward voltage	$I_F = 7.5\text{ A}; T_j = 150\text{ °C}$ $I_F = 15\text{ A}; T_j = 150\text{ °C}$ $I_F = 15\text{ A}$	V_F	-	0.38	0.42	V
			-	0.57	0.62	V
			-	0.59	0.64	V
Reverse current	$V_R = V_{RRM}$ $V_R = V_{RRM}; T_j = 100\text{ °C}$	I_R	-	1.0	10.0	mA
			-	15	30	mA
Junction capacitance	$f = 1\text{ MHz}; V_R = 5\text{ V}; T_j = 25\text{ °C}$ to 125 °C	C_d	-	350	-	pF
Internal cathode inductance	Measured from tab to centre of die	L_k	-	3.5	-	nH
Internal cathode inductance	Measured from cathode lead solder point to centre of die	L_k	-	4.5	-	nH
Internal anode inductance	Measured from anode lead solder point to centre of die	L_a	-	7.5	-	nH

Rectifier diodes
Schottky barrier


PBYL1520CT, PBYL1520CTB
PBYL1525CT, PBYL1525CTB

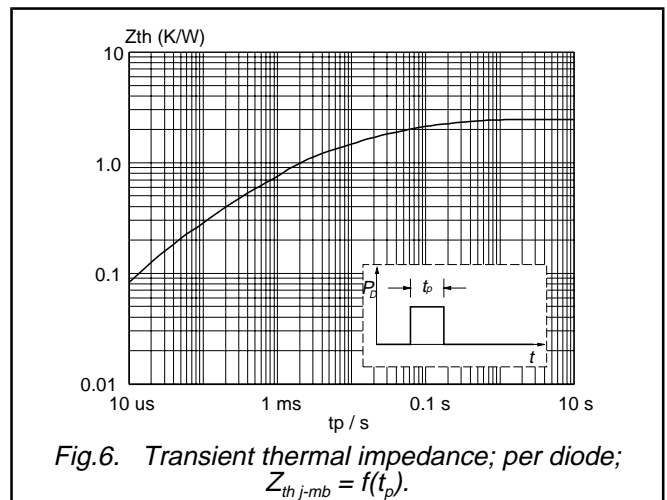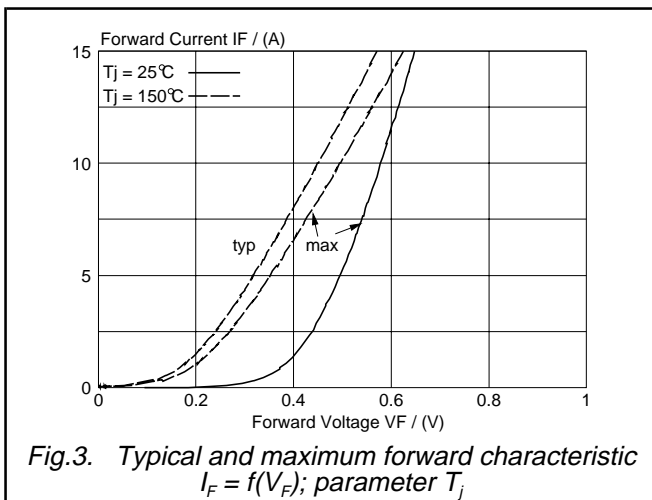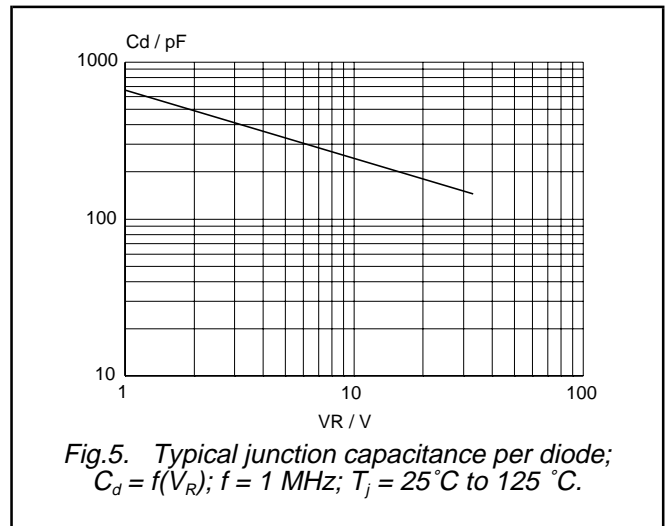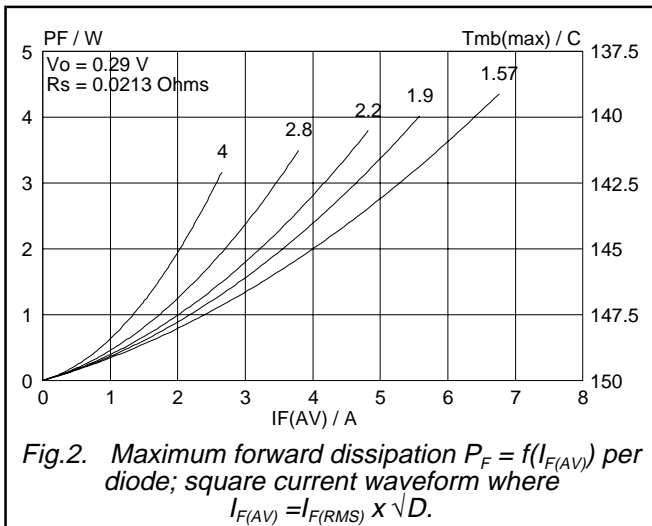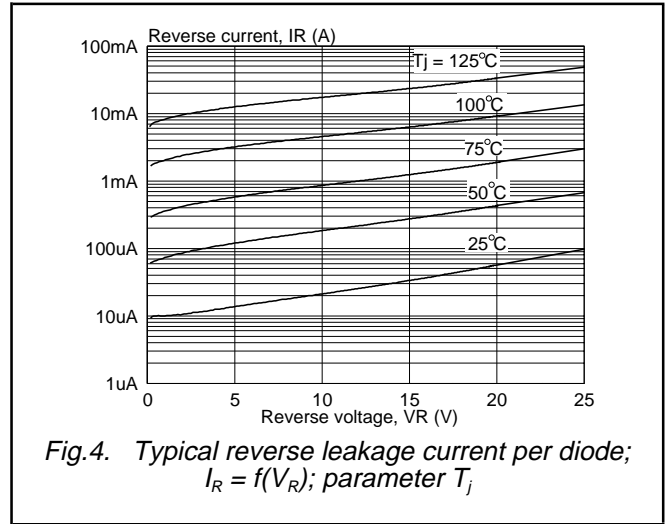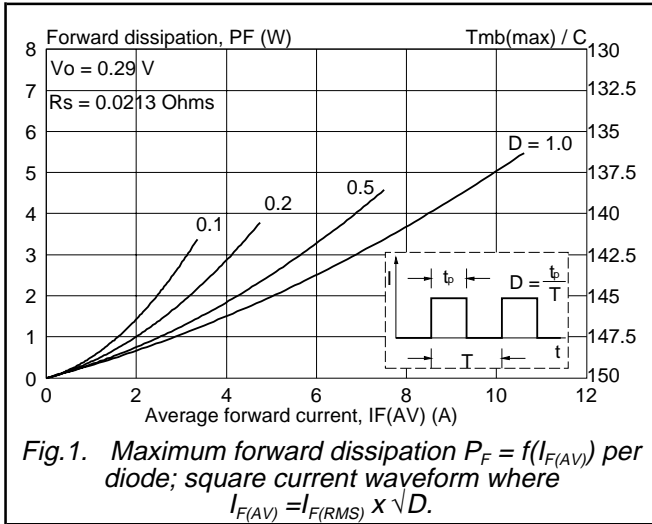

Rectifier diodes
Schottky barrier

PBYL1520CT, PBYL1520CTB
PBYL1525CT, PBYL1525CTB

MECHANICAL DATA

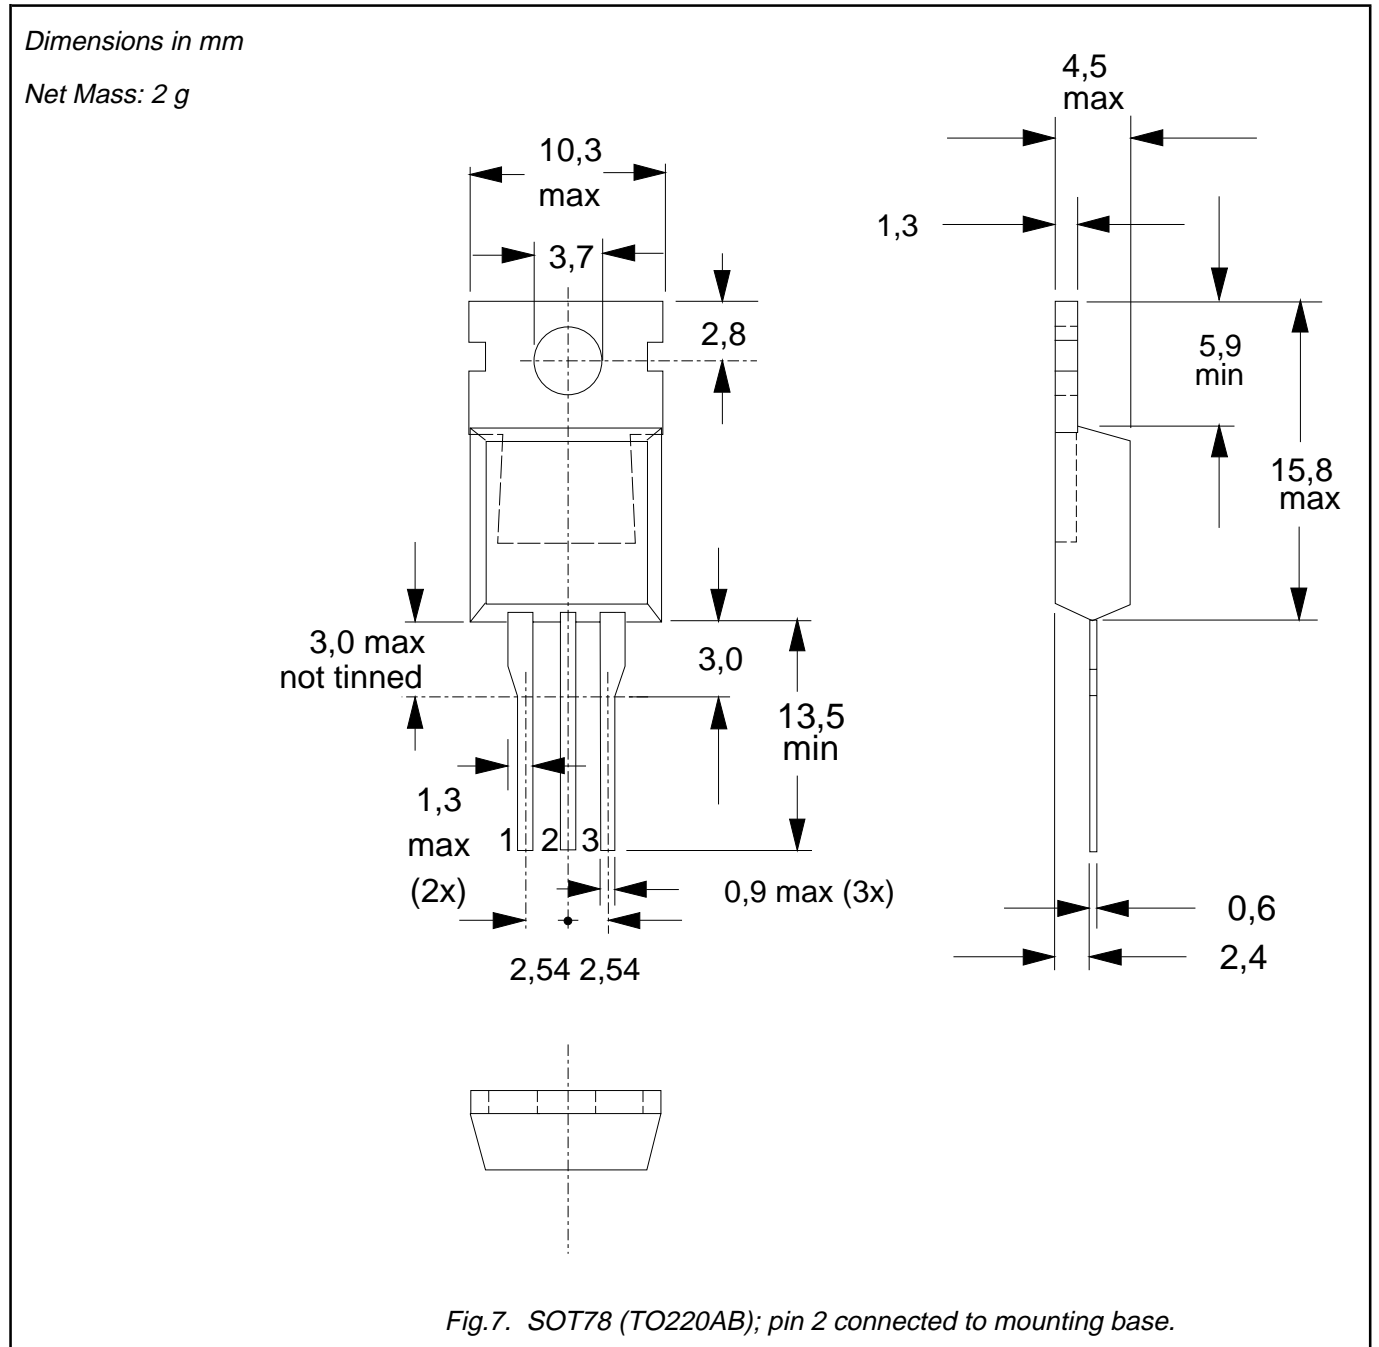


Notes

1. Observe the general handling precautions for electrostatic-discharge sensitive devices (ESDs) to prevent damage to MOS gate oxide.
2. Refer to mounting instructions for SOT78 (TO220) envelopes.
3. Epoxy meets UL94 V0 at 1/8".


Rectifier diodes
Schottky barrier

PBYL1520CT, PBYL1520CTB
PBYL1525CT, PBYL1525CTB

MECHANICAL DATA

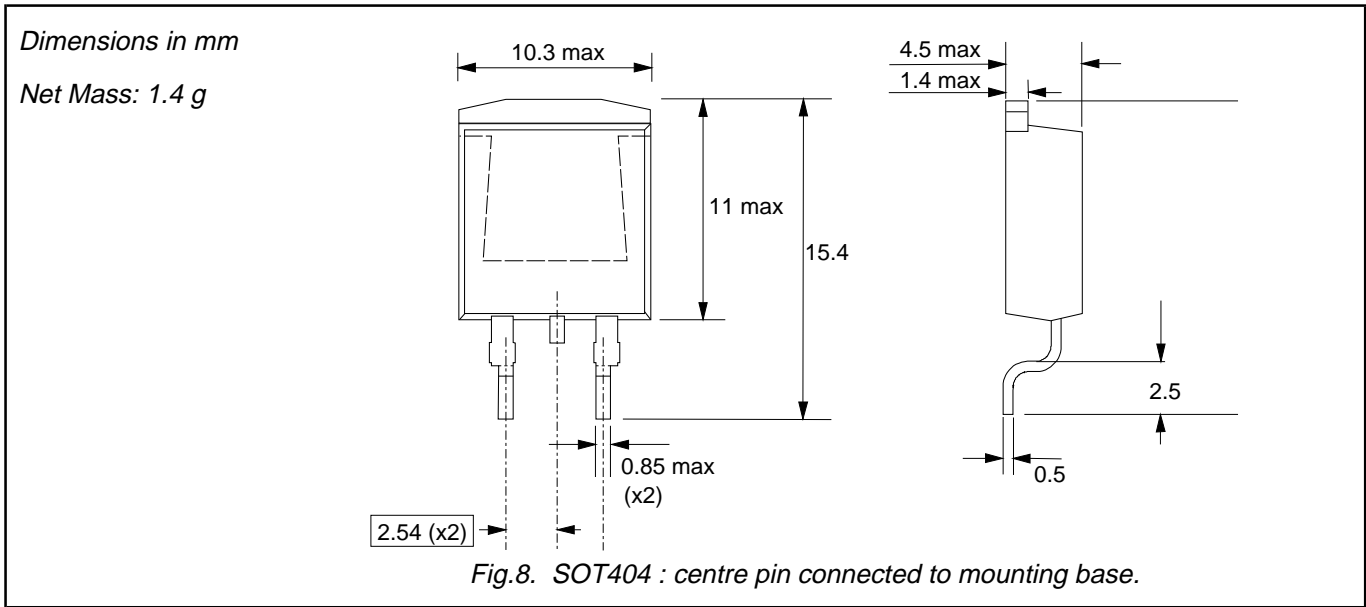

MOUNTING INSTRUCTIONS

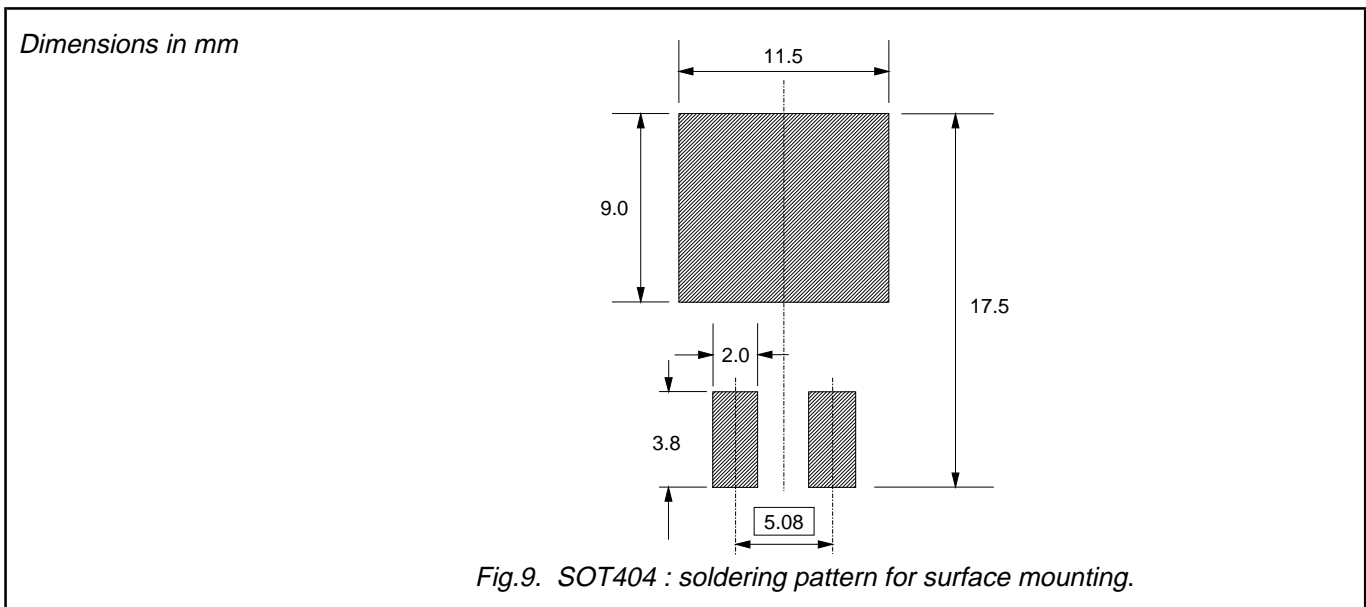

Notes

1. Observe the general handling precautions for electrostatic-discharge sensitive devices (ESDs) to prevent damage to MOS gate oxide.
2. Epoxy meets UL94 V0 at 1/8".

Rectifier diodes
Schottky barrier

PBYL1520CT, PBYL1520CTB
PBYL1525CT, PBYL1525CTB

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1997	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.