


Single Line LED Displays

Ferrograph Single Line LED Displays provide a reliable solution for many applications.

Mono or Tri-colour models in 3 character heights – 30mm, 50mm or 100mm with character lengths from 5 upwards in multiples of 5 characters offers the ultimate flexibility for many applications.

Control options include the standard RS232 and RS485 interface as well as the IBIS variant and infra-red remote control PC editing software is provided as standard.

All units can be ceiling or wall mounted.

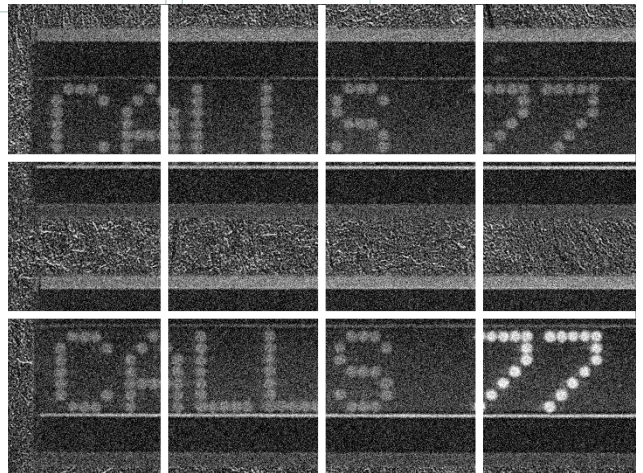

FERROGRAPH®

www.densitron.com/ferrograph sales@densitron.com

COMPUTERS PUBLIC INFORMATION DISPLAYS DISPLAY TECHNOLOGIES

NOVEL ENGINEERING, WORLDWIDE SOLUTIONS



Technical Specification



Model	Character Height	No of Character	Size (mm) L x H x D	Power Consumption (w)	Weight (Kg)
FDS 13/10 DX	30mm	10	285 x 123 x 75	17	3.4
FDS 13/15 DX	30mm	15	422 x 123 x 75	25	3.8
FDS 13/20 DX	30mm	20	559 x 123 x 75	33	4.2
FDS 13/25 DX	30mm	25	696 x 123 x 75	42	4.6
FDS 13/30 DX	30mm	30	833 x 123 x 75	50	5.0
FDS 15/10 DX	50mm	10	469 x 123 x 75	17	4.0
FDS 15/15 DX	50mm	15	699 x 123 x 75	25	5.0
FDS 15/20 DX	50mm	20	928 x 123 x 75	33	6.0
FDS 15/25 DX	50mm	25	1158 x 123 x 75	42	7.0
FDS 15/30 DX	50mm	30	1387 x 123 x 75	50	8.0
FDS 100/10 DX	100mm	10	924 x 182 x 75	21	9.2
FDS 100/15 DX	100mm	15	1381 x 182 x 75	31	12.1
FDS 100/20 DX	100mm	20	1838 x 182 x 75	41	15.0
FDS 100/25 DX	100mm	25	2295 x 182 x 75	51	17.8
FDS 100/30 DX	100mm	30	2752 x 182 x 75	61	21.0

DX denotes suitability for ISDX systems.

GENERAL

Power	:	200 - 260 volt. 50 - 60 Hz (110 volt option selectable).
Temperature	:	0 to 50 degrees celsius.
Storage	:	-20 to 70 degrees celsius.
Humidity	:	80% RH less (non-condensing).
Serial Communication	:	RS232 or RS485 (selectable).
Data Transfer Rate	:	1200, 2400, 4800 or 9600 baud (selectable).
Network Address	:	15 (expandable up to 255).
Power Supply	:	EN 60950 (fitted internally).

We reserve the right to vary this specification without notice.

FERROGRAPH®